

FIG. 1

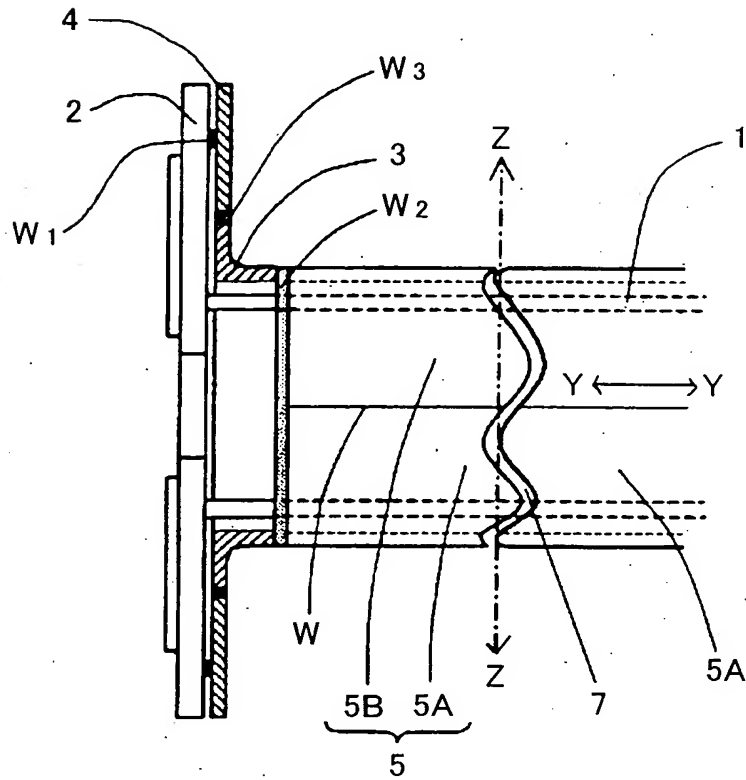


FIG. 2

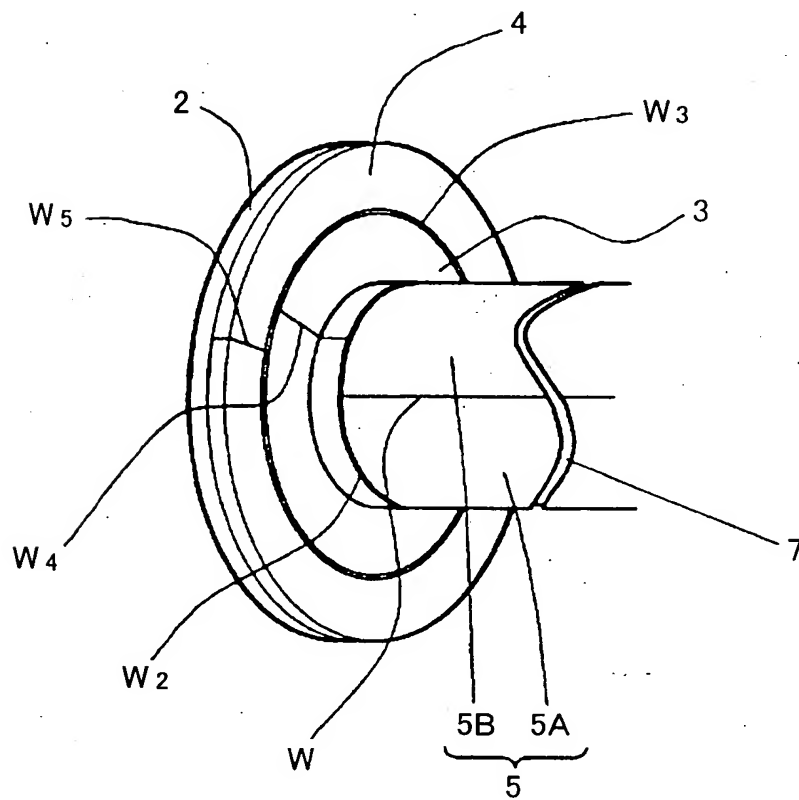


FIG. 3

A reel around which metallic wire of 1.5 ton
 can be wound : The Reel of The Present Invention

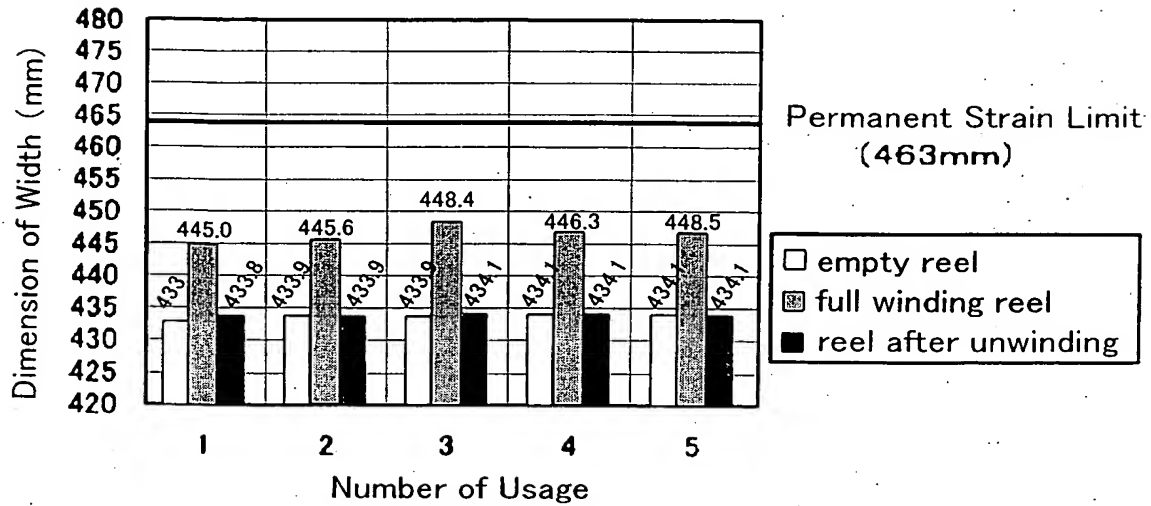


FIG. 4A

A reel around which metallic wire of 1.5 ton
 can be wound : The Conventional Reel

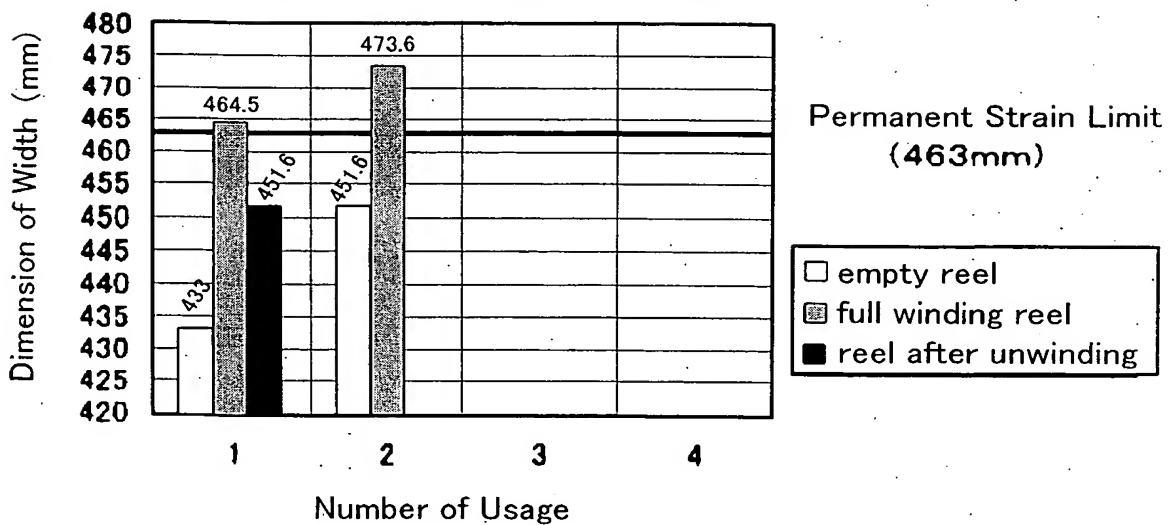


FIG. 4B

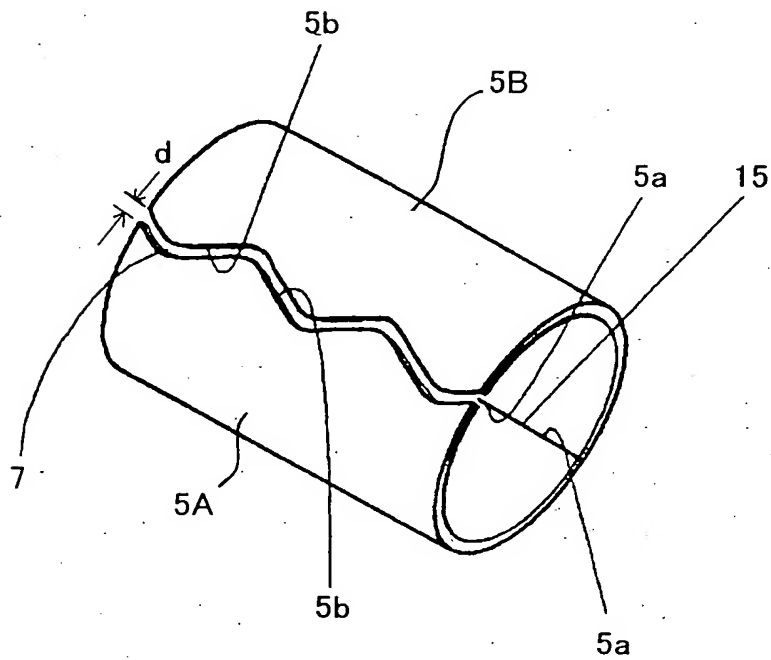


FIG. 5A

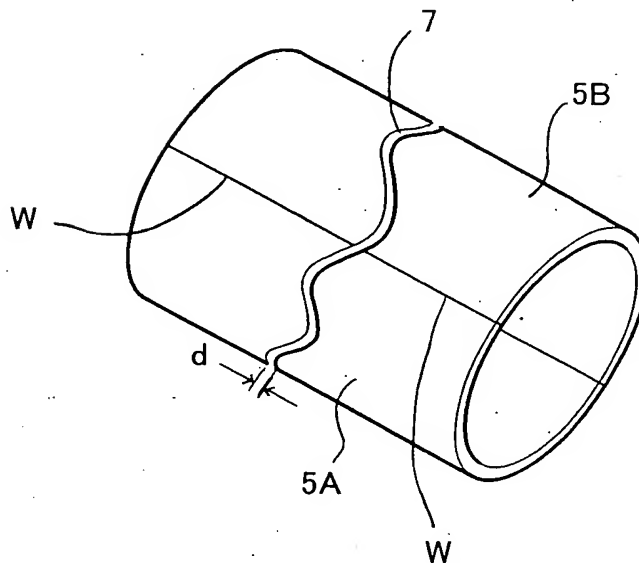


FIG. 5B

FIG. 6A

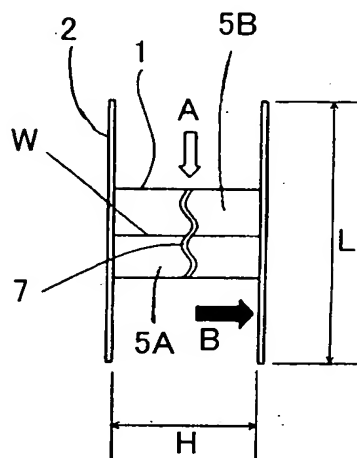


FIG. 6B




FIG. 6C

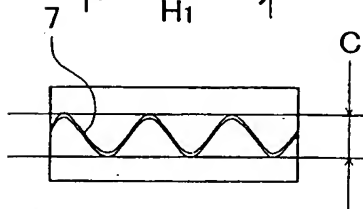


FIG. 6D





FIG. 6E



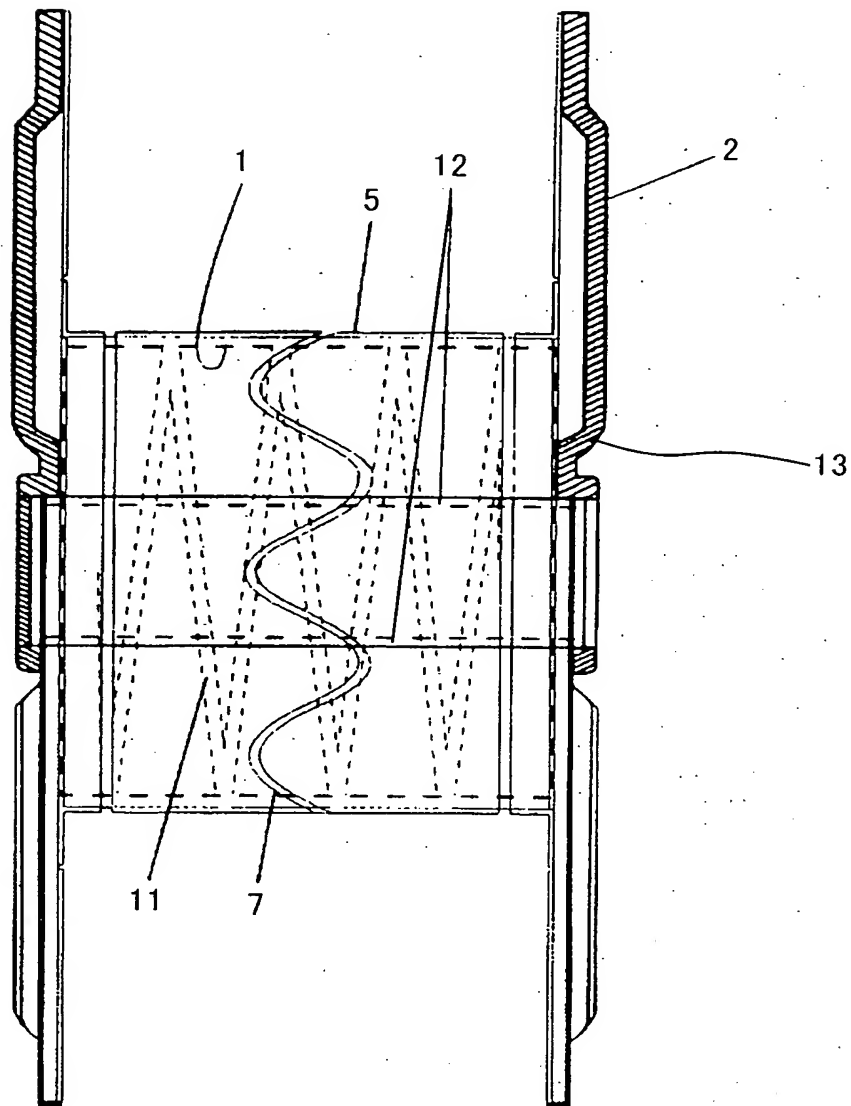


FIG. 7

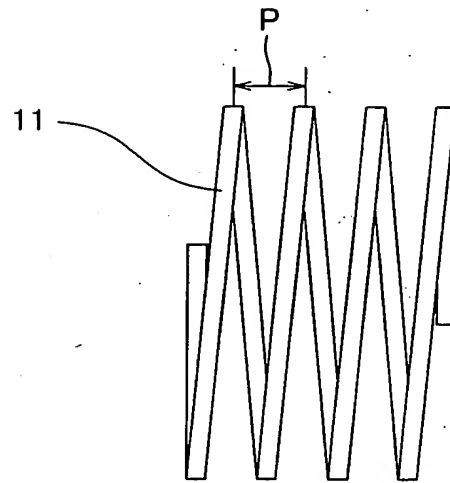


FIG. 8A

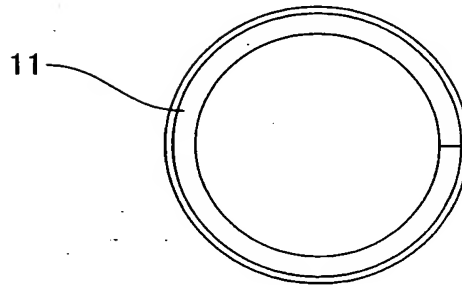


FIG. 8B

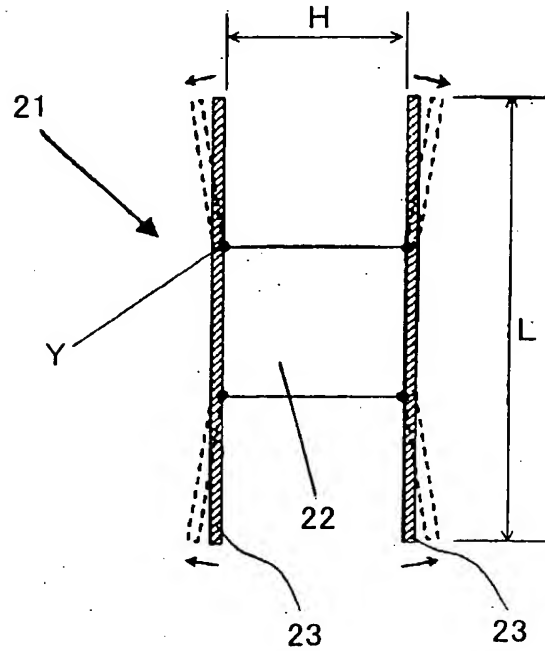


FIG. 9

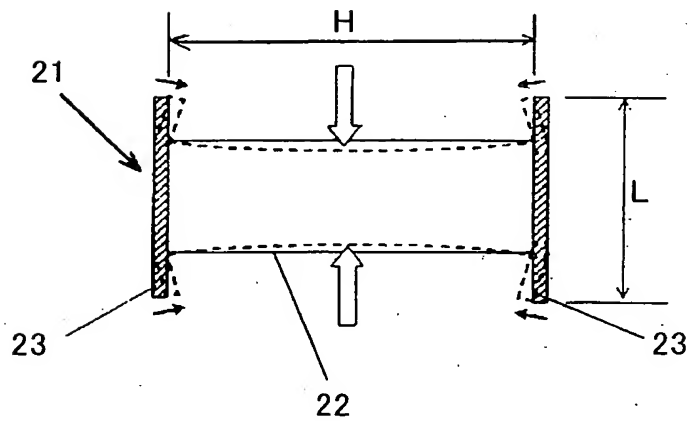


FIG. 10

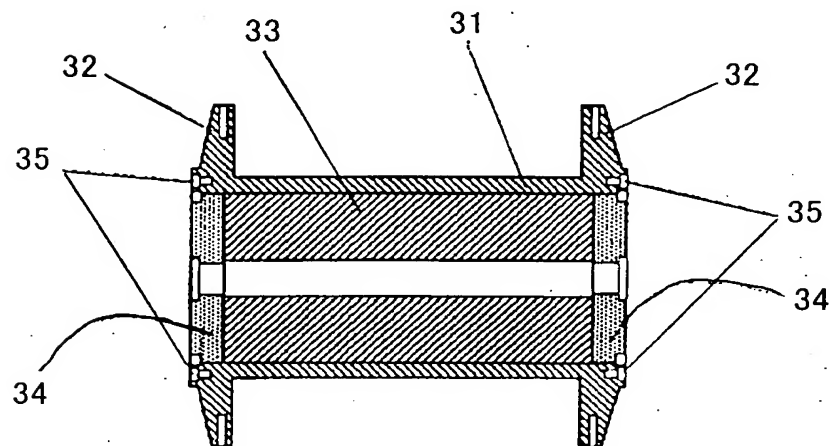


FIG. 11

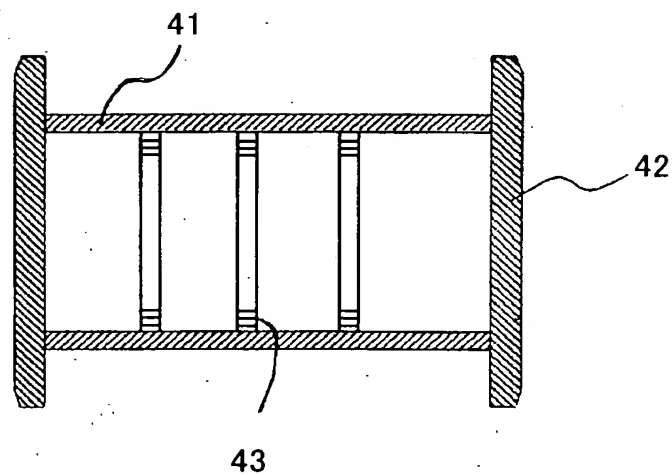


FIG. 12

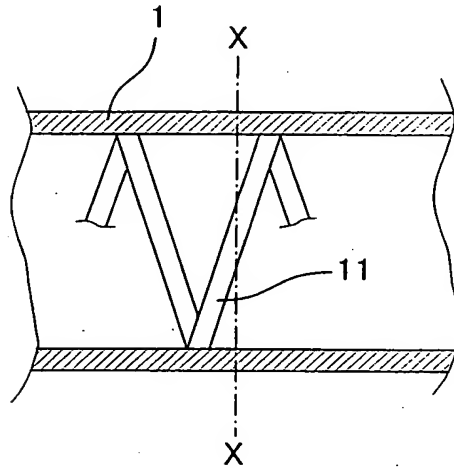


FIG. 13

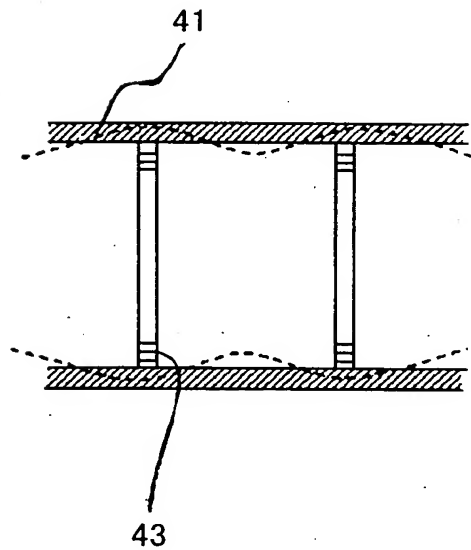


FIG. 14